




Outline Drawing

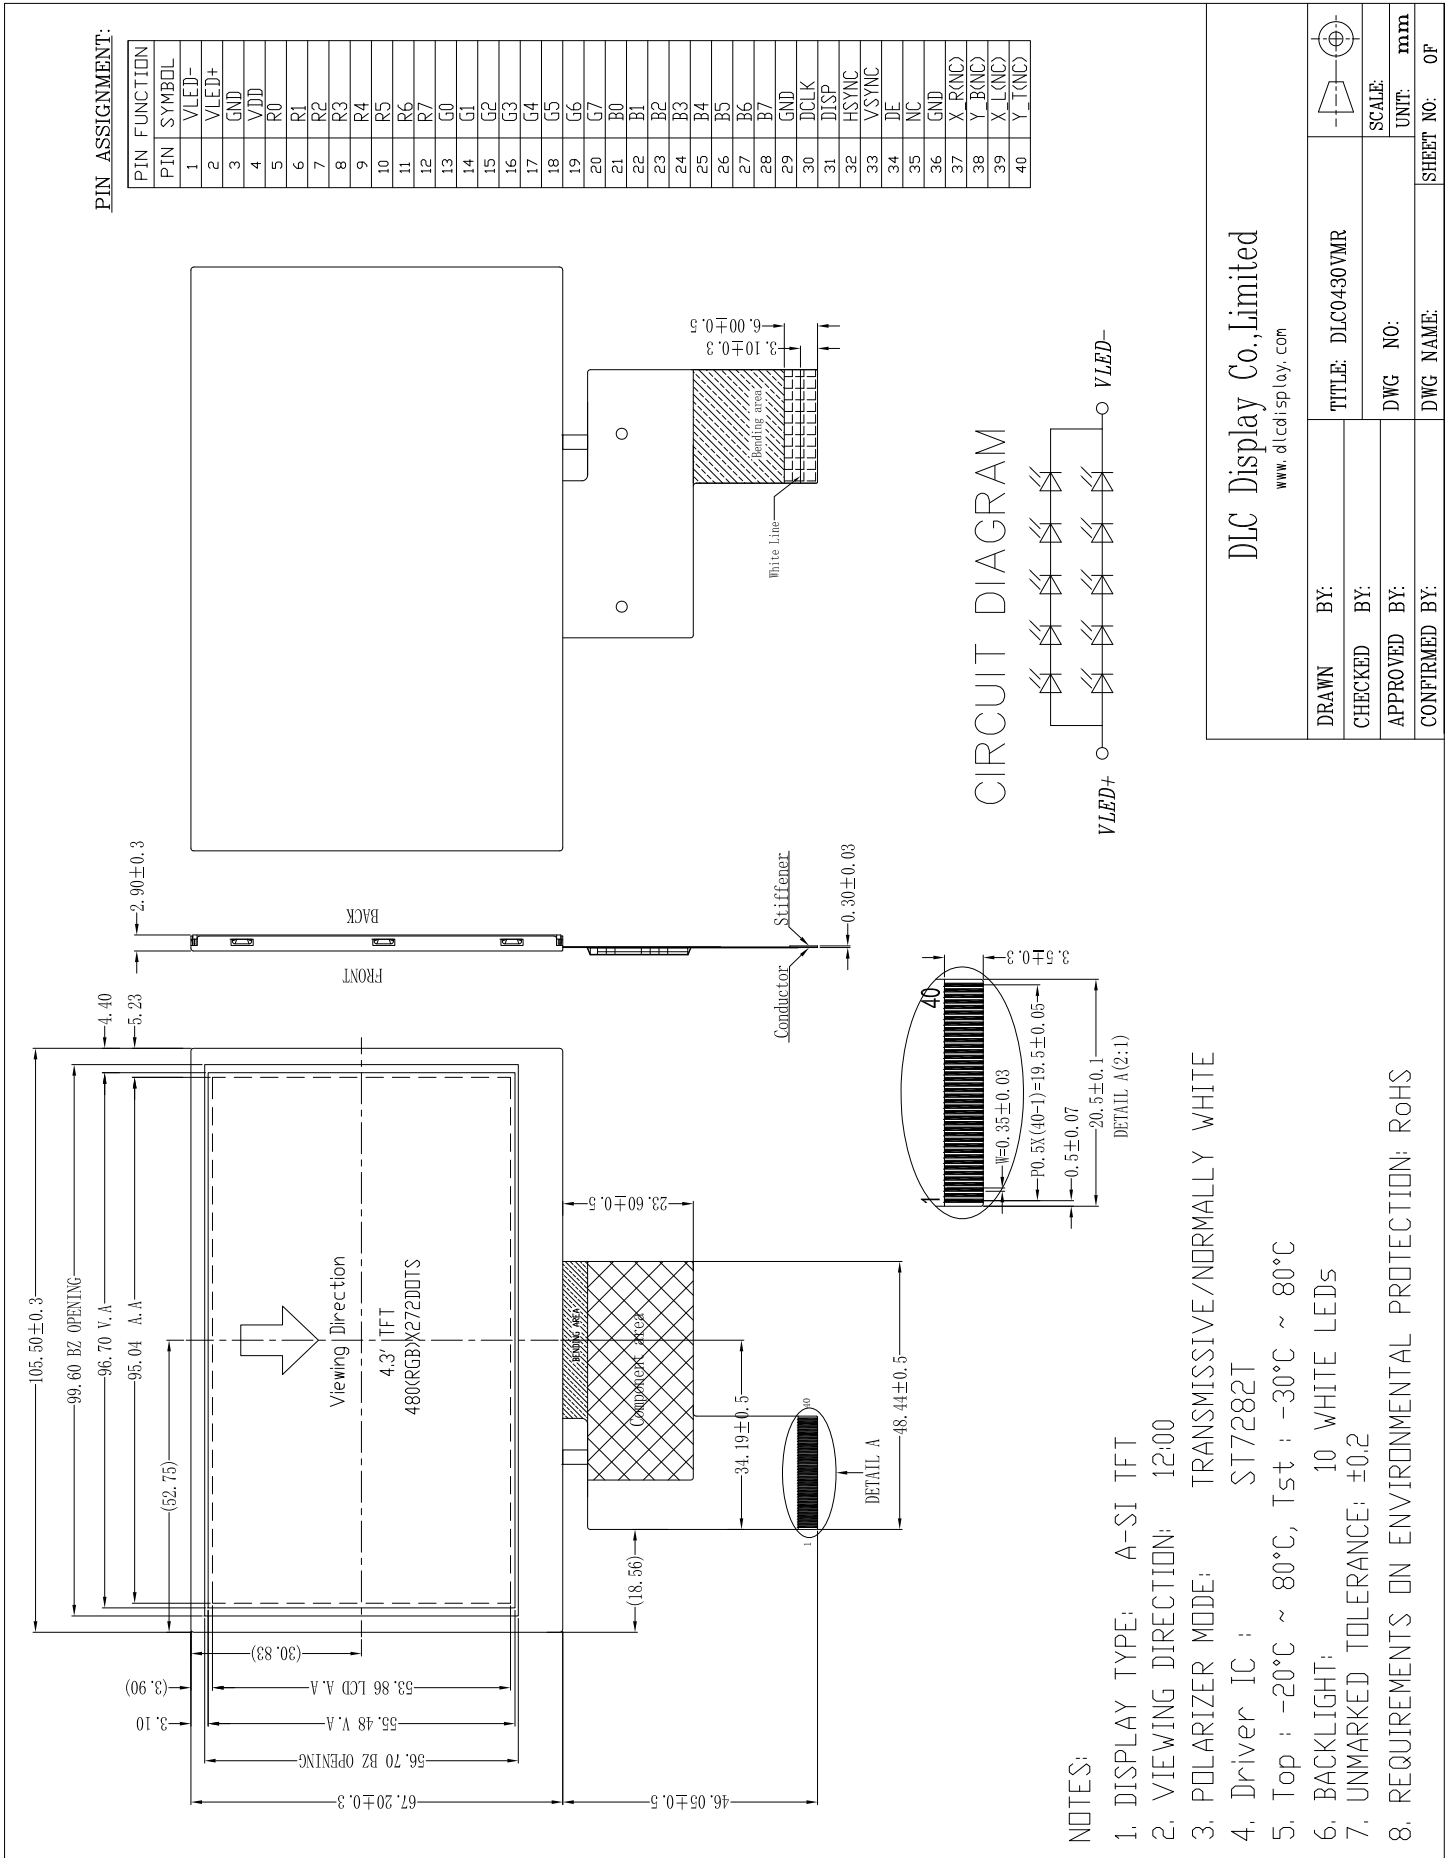

PIN ASSIGNMENT:

PIN	FUNCTION	SYMBOL
1	VLED-	
2	VLED+	
3	GND	
4	VDD	
5	R0	
6	R1	
7	R2	
8	R3	
9	R4	
10	R5	
11	R6	
12	R7	
13	G0	
14	G1	
15	G2	
16	G3	
17	G4	
18	G5	
19	G6	
20	G7	
21	B0	
22	B1	
23	B2	
24	B3	
25	B4	
26	B5	
27	B6	
28	B7	
29	GND	
30	DCLK	
31	DISP	
32	HSYNC	
33	VSYS	
34	DE	
35	NC	
36	GND	
37	X-R(NC)	
38	Y-B(NC)	
39	X-L(NC)	
40	Y-T(NC)	

CIRCUIT DIAGRAM



NOTES:

1. DISPLAY TYPE: A-SI TFT
2. VIEWING DIRECTION: 12:00
3. POLARIZER MODE: TRANSMISSIVE/NORMALLY WHITE
4. Driver IC : ST7282T
5. Top : -20°C ~ 80°C, Tst : -30°C ~ 80°C
6. BACKLIGHT: 10 WHITE LEDs
7. UNMARKED TOLERANCE: ±0.2
8. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

DLC Display Co., Limited www.dlcdisplay.com	
DRAWN BY:	TITLE: DLC0430VMR
CHECKED BY:	SCALE:
APPROVED BY:	DWG NO:
CONFIRMED BY:	DWG NAME:
	SHEET NO: OF