
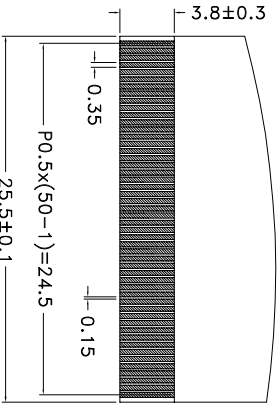
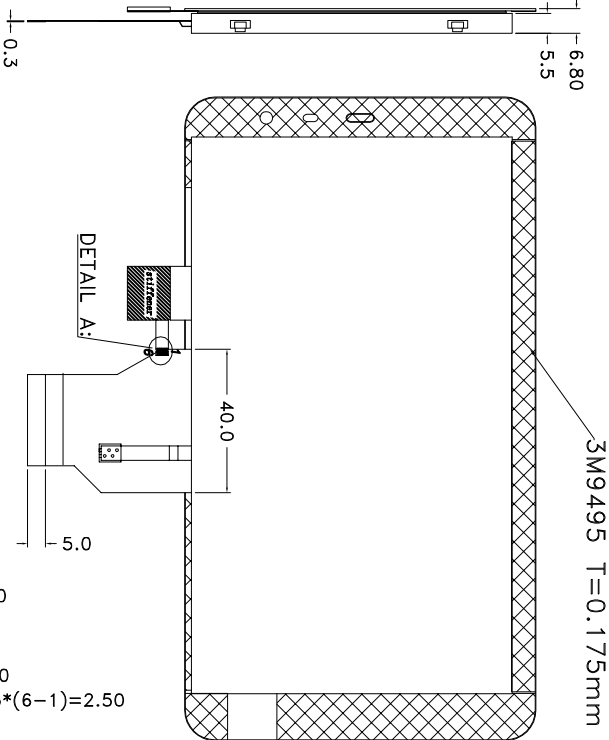


PIN DESCRIPTION

Pin No.	Symbol	Pin No.	Symbol
1	VLED+	26	G1
2	VLED+	27	G0
3	VLED-	28	R7
4	DIM0	29	R6
5	GND	30	R5
6	VCOM	31	R4
7	DYDD	32	R3
8	MODE	33	R2
9	DE	34	R1
10	VS	35	R0
11	HS	36	GND
12	B7	37	DCLK
13	B6	38	GND
14	B5	39	L/R
15	B4	40	U/D
16	B3	41	VGH
17	B2	42	VGL
18	B1	43	AVDD
19	B0	44	RESET
20	G7	45	NC
21	G6	46	VCOM
22	G5	47	DITHB
23	G4	48	GND
24	G3	49	NC
25	G2	50	NC

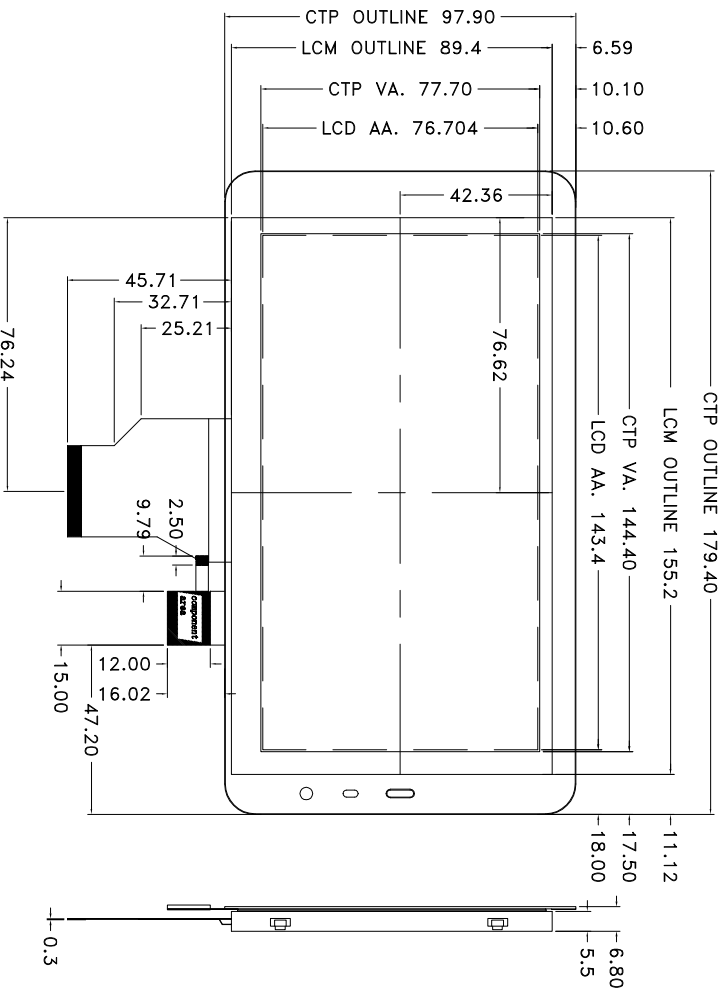

SCALE 4:1

- NOTES:
- 1.DISPLAY TYPE: a-si TFT
 - 2.DISPLAY MODULE :Transmissive,Normally White
 - 3.OPERATING TEMP: -20°C ~ 70°C
 - 4.STORAGE TEMP: -30°C ~ 80°C
 - 5.BACKLIGHT: LED
 - 6.RoHS Compliant
 - 7.VIEWING DIRECTION : 12:00 O'clock

TP	PIN NAME	DRAWN BY:	CHECKED BY:	APPROVED BY:	CONFIRMED BY:	TITLE:	DWG NO:	DWG NAME:	SHEET NO:	SCALE:	UNIT:
1	SDA					DIC Display Co., Limited www.dicdisplay.com				mm	
2	SCL										
3	RST										
4	INT										
5	GND										
6	VDD										
							DLC0650AIG-T-1				
										OR	