

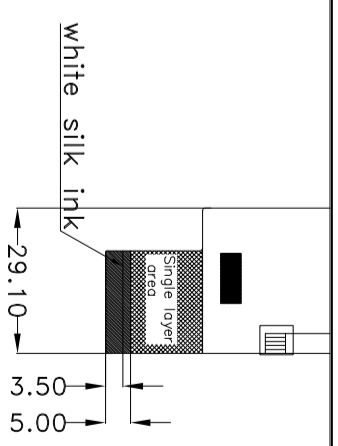


PIN DESCRIPTION

| Pin No. | Symbol    |
|---------|-----------|
| 1       | VCOM      |
| 2       | VDD       |
| 3       | VDD       |
| 4       | NC        |
| 5       | RESET     |
| 6       | STBYB     |
| 7       | GND       |
| 8       | RXIN0-    |
| 9       | RXIN0+    |
| 10      | GND       |
| 11      | RXIN1-    |
| 12      | RXIN1+    |
| 13      | GND       |
| 14      | RXIN2-    |
| 15      | RXIN2+    |
| 16      | GND       |
| 17      | RXCCLKIN_ |
| 18      | RXCCLKIN+ |
| 19      | GND       |
| 20      | RXIN3_    |
| 21      | RXIN3+    |
| 22      | GND       |
| 23      | NC        |
| 24      | NC        |
| 25      | GND       |
| 26      | NC        |
| 27      | DIM0      |
| 28      | SELB      |
| 29      | AVDD      |
| 30      | GND       |
| 31      | LED_      |
| 32      | LED-      |
| 33      | L/R       |
| 34      | U/D       |
| 35      | VGL       |
| 36      | CABCEN1   |
| 37      | CABCEN0   |
| 38      | VGH       |
| 39      | LED+      |
| 40      | LED+      |

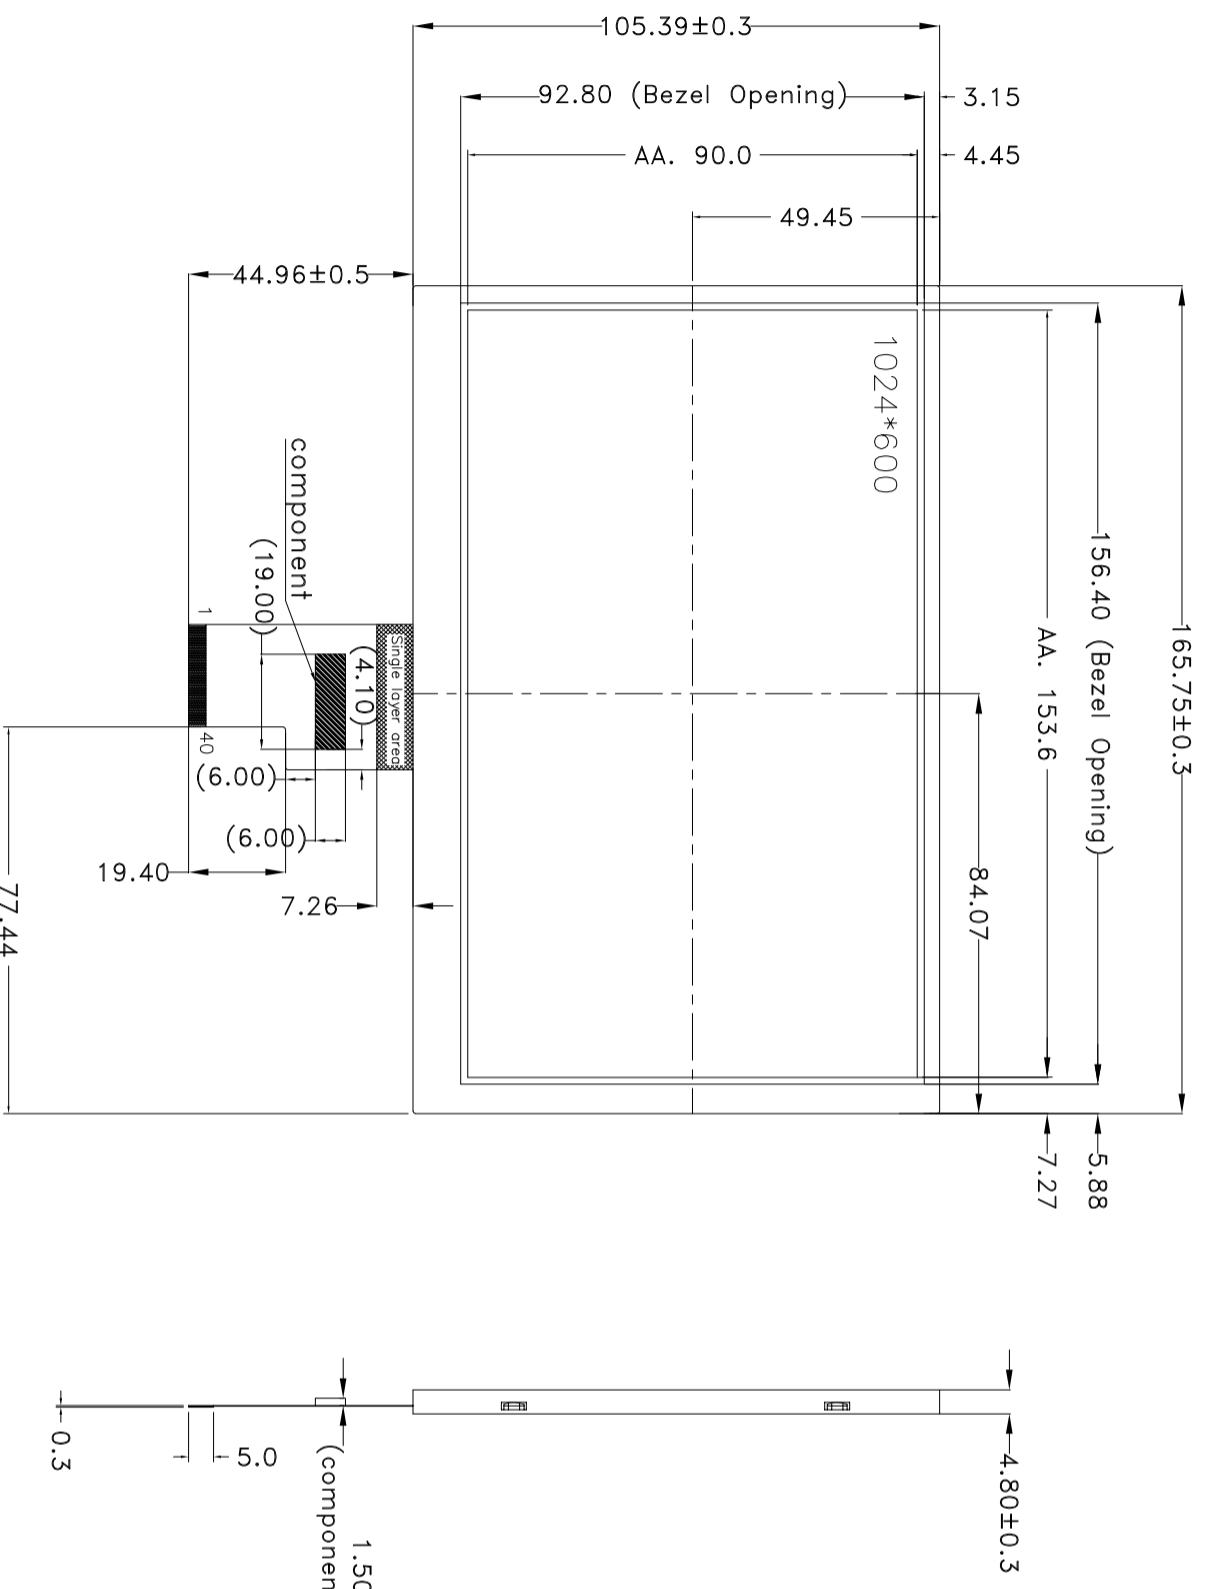

FH12A-40S-0.5SH  
SCALE 4 : 1

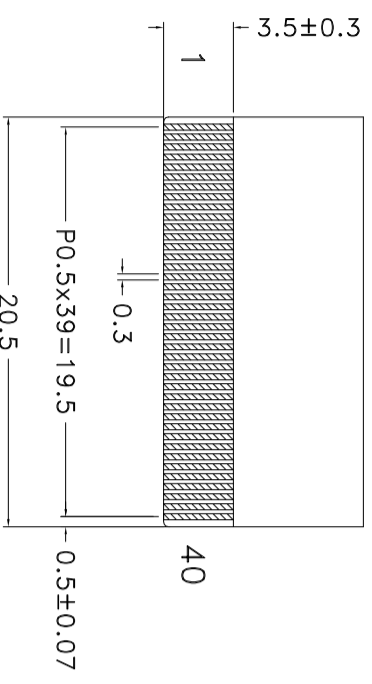

- NOTES:
- 1.DISPLAY TYPE: a-si TFT
  - 2.VIEING DIRECTION: 12:00 O'clock
  - 3.DISPLAY MODULE :Transmissive,Normally White
  - 4.OPERATING TEMP: -30°C ~ 80°C
  - 5.STORAGE TEMP: -30°C ~ 80°C
  - 6.BACKLIGHT: LED
  - 7.RoHS Complicant

|   |  |                      |    |
|---|--|----------------------|----|
| <p>DLC Display Co., Limited</p> <p>www.dlcdisplay.com</p> |  |                      |    |
| DRAWN BY:   |  | TITLE: DL C0700JMG-6 |    |
| CHECKED BY:   |  | DWG NO:              |    |
| APPROVED BY:  |  | DWG NAME:            |    |
| CONFIRMED BY:   |  | SHEET NO:            | OF |