


| No: | PIN NAME |
|-----|----------|
| 1 | C2P |
| 2 | C2N |
| 3 | C1P |
| 4 | C1N |
| 5 | VBAT |
| 6 | VBREF |
| 7 | VSS |
| 8 | VDD |
| 9 | RES# |
| 10 | SCL |
| 11 | SDA |
| 12 | IREF |
| 13 | VCOMH |
| 14 | VCC |

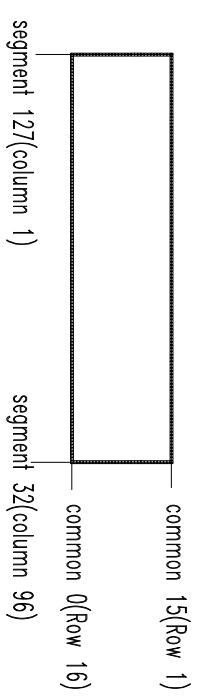

- NOTES:
- 1.DISPLAY TYPE: OLED
 - 2.DRIVE IC: SSD1306
 - 3.OPERATING TEMP: -40°C ~ 85°C
 - 4.STORAGE TEMP: -40°C ~ 85°C
 - 5.DRIVE METHOD: 1/16 DUTY
 - 6.General Tolerance : ±0.3mm
 - 7.RoHS Complicant

DLC Display Co., Limited
www.dlcdisplay.com

| | |
|---------------|------------------------|
| DRAWN BY: | TITLE: DLC0084AN0G-B |
| CHECKED BY: | SCALE: |
| APPROVED BY: | DWG NO: mm |
| CONFIRMED BY: | DWG NAME: SHEET NO: OF |