
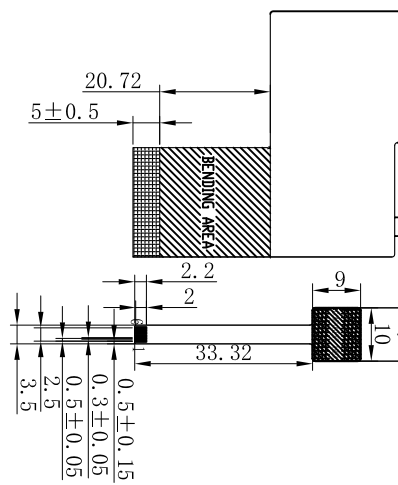

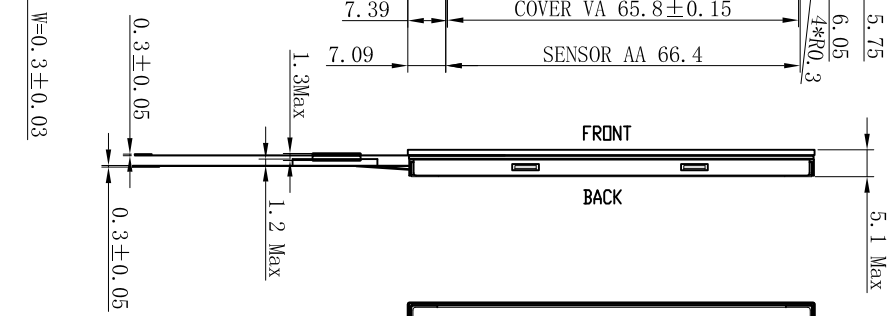


- NOTES:
1. DISPLAY TYPE: TFT
 2. VIEWING DIRECTION: 12:00
 3. BACKLIGHT: 12 WHITE LED
 4. OPERATING TEMP.: -20°C--+70°C
 5. STORAGE TEMP.: -30°C--+80°C
 6. UNMARKED TOLERANCE: ±0.2
 7. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: ROHS

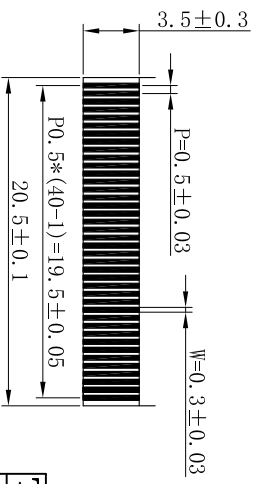

PIN	SYMBOL	PIN FUNCTION
1	VLED-	
2	VLED+	
3	GND	
4	VDD	
5	R0	
6	R1	
7	R2	
8	R3	
9	R4	
10	R5	
11	R6	
12	R7	
13	G0	
14	G1	
15	G2	
16	G3	
17	G4	
18	G5	
19	G6	
20	G7	
21	B0	
22	B1	
23	B2	
24	B3	
25	B4	
26	B5	
27	B6	
28	B7	
29	GND	
30	PCLK	
31	DISP	
32	HSYNC	
33	VSYNC	
34	DE	
35	NC	
36	GND	
37	X1	
38	Y1	
39	X2	
40	Y2	

TP	PIN	COMMENTS
1	VDD	-2.8V
2	SCL	
3	SDA	
4	INT	
5	RST	
6	GND	

DLC Display Co., Limited
www.dlccdisplay.com

DRAWN BY:	APPROVED BY:	CONFIRMED BY:	TITLE: DLC05001ZG-T-5	SCALE:	UNIT:
CHECKED BY:	DWG NO.:	DWG NAME:		mm	mm
					OP
					SHEET NO.: