
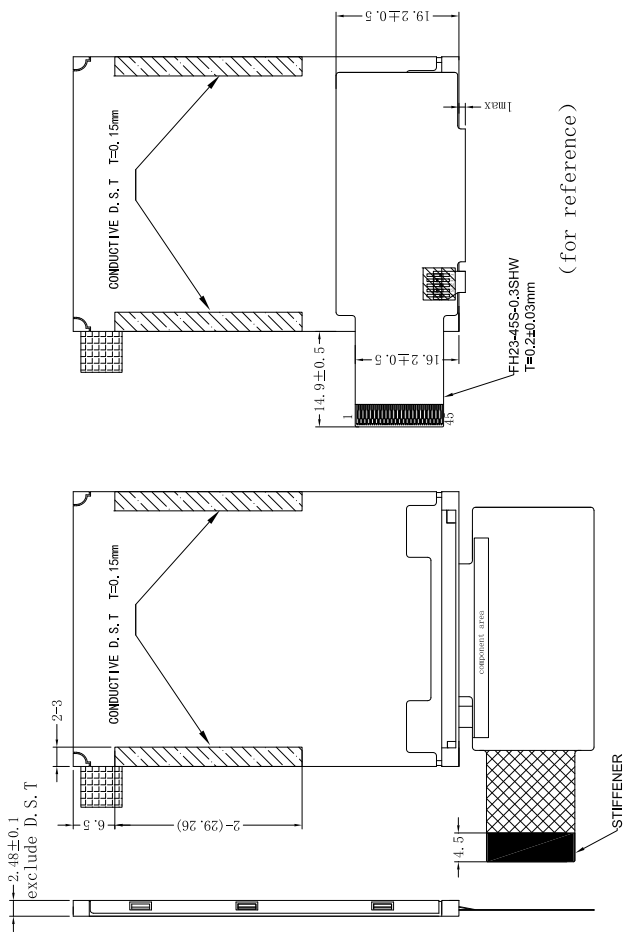


Outline Drawing

PIN DEFINITION:

1	VCI
2	IOVCC
3	IM0
4	IM1
5	IM2
6	IM3
7	RESET
8	VSYNC
9	Hsync
10	DOTCLK
11	ENABLE
12	DB17
13	DB16
14	DB15
15	DB14
16	DB13
17	DB12
18	DB11
19	DB10
20	DB9
21	DB8
22	DB7
23	DB6
24	DB5
25	DB4
26	DB3
27	DB2
28	DB1
29	DB0
30	S00
31	S01
32	RD
33	WR/SCL
34	RS
35	CS
36	GND
37	LEDA
38	LEDB1
39	LEDB2
40	NC
41	NC
42	NC
43	NC
44	NC
45	NC

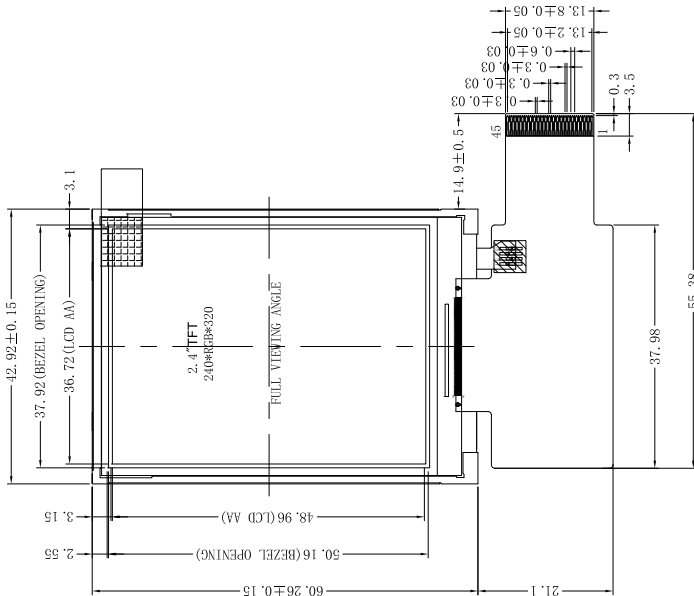

LED CIRCUIT DIAGRAM:



IF=20*2mA VF=6. 6V (TYP)

NOTE:

- 1 DISPLAY TYPE : 2.4" QVGA TFT
- 2 DISPLAY MODE : TRANSFLECTIVE/NORMALLY BLACK
- 3 OPERATING TEMP : -20°C---+70°C
- 4 STORAGE TEMP : -30°C---+80°C
- 5 DRIVER IC : ILI9325C
- 6 UNSPECIFIED TOLERANCE ±0.2
- 7 RoHS compliance

DLC Display Co., Limited

www.dlcdisplay.com

DRAWN BY:	TITLE: DLC0240RZS		SCALE:
CHECKED BY:	DWG NO:		UNIT: mm
APPROVED BY:	DWG NAME:	SHEET NO:	OF
CONFIRMED BY:			